

# SKA2R1

## 60G mmW RF stamp hole module

### 1. Overview

### 2. Features

- 
- 
- 
- 
- 
- 

Support coaxial high speed rotation

### 3. Application

- 
- 


### 4. Block

SKA2R1


1.8V





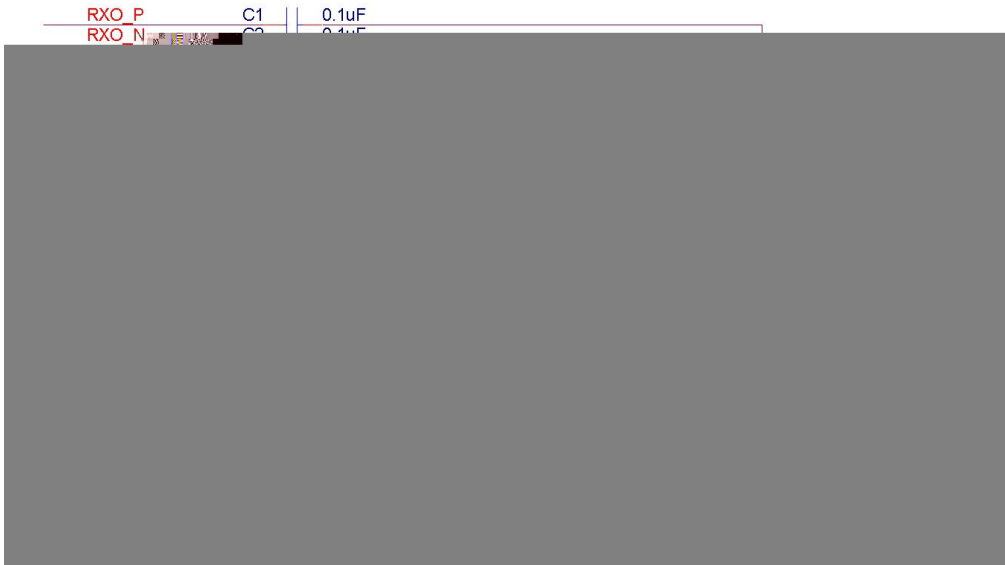

Attenuator sample: 800mV to 400mV

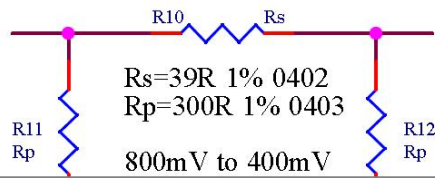

Note:

1. DC blocking capacitor close to module for RXO
2. DC blocking capacitor close to CPU for TXI
3. Resistor attenuator for level shift. ST60 supports


## 7. Power supply





